

IS 3696-1987

IS 4014-1967

BS-EN 12811-1-2003

ANSI-10.8-2019

OSHA 29-1926
SUBCLAUSE-L

Prime Steeltech India manufactures a complete range of Pre-Galvanized (GP) mild-steel Anti-Skid Walkway Planks for industrial, construction and infrastructure projects. Engineered for repeated assembly / dismantling and compatible with all major scaffolding systems including cuplock, tube-and-coupler, frame and ringlock. Internal transverse stiffeners at 500 mm centers provide superior load distribution and deflection control throughout the full range of standard lengths.

PRIME STEELTECH INDIA offers Scaffolding Planks with Dog-Ear Hooks and Hemispherical Hooks. Both hook variants are manufactured from E250 grade HR (MS) sheet for superior strength, durability, and reliable performance.

STEEL GRADE (MS SHEET)	IS 2062 E250
STEELGRADE (GP SHEET)	IS 277:1951
STEELGRADE (FOR HOOKS)	IS 2062 E250
M.S./G.P. SHEET THICKNESS	14 / 16 Gauge – 2 mm / 1.6 mm
GALVANISING	Min 45µm zinc · ENISO 1461
DENSITY (ANTISKID DIMPLE)	246.11 Dimples/ m ²

Anti-Skid Surface Options



Antiskid-Dimple Plate

Standard on all planks

Hemispherical dimples cold-pressed into the deck with round perforations between them. Omnidirectional grip; perforations drain water and debris away.



Diamond Checker Plate

Available on request

Diamond-pattern embossed anti-slip surface on galvanized steel decking. Excellent slip resistance in both longitudinal and transverse directions. Suitable for scaffold & access platforms.



Checker Plate

Available on request

Parallel raised ribs with linear drainage channels between bars. Suited to heavy-duty industrial platforms, oil & gas plants and food-processing walkways.

Internal Stiffeners—Design & Function

Without reinforcement, thin walkway plates deflect excessively under platform live loads (UPTO 450 kg/m²). All Prime Steeltech India planks are fitted with stiffeners - U-section - MIG/MAG fillet-welded to the deck underside per IS 816, subdividing the span into stiffer bays.

TRANSVERSE STIFFENERS (Across the length)	Run perpendicular to walking direction. Spaced at 500 mm c/c on all planks. Shortens effective span, controls primary bending and deflection.	DESIGN CHECK Bending stress, shear at supports, and deflection—verified for both UDL and point load. Deflection capped at Span/60 (IS3696-1987) 10-or 15 mm overall.
LONGITUDINAL STIFFENERS (Along the length)	Run parallel to walking direction. Added when plank width exceeds ~400 mm – splits the width into two narrower compliant bays to control cross-bending.	GALVANISING All stiffeners are pre-galvanized then welded. After welding, Aluminum rich paint is applied on the welded joints.
END PLATE	Placed at the end of each plate to protect the hook / end-fitting zone against localized crushing at the support point.	RIBS Available in 2-fold and 3-fold rib profiles. Standard 38 mm rib height, with 42 mm, 45 mm, and 50 mm options. Higher rib heights feature additional folds for improved strength and rigidity.

Welded stiffener areas are coated with aluminum-rich paint to restore corrosion protection lost during welding. The coating protects the heat-affected zone from rust and environmental corrosion.

This improves the durability, reliability, and service life of the walkway plank.


Standard Size

Length	Width	Height	Edge Treatment
3000 mm	300 / 280 / 240 mm	38 (Standard) / 42 / 45 / 50 mm	Double/Triple Bent Edges, Fully Welded Corners
2500 mm	300 / 280 / 240 mm	38 (Standard) / 42 / 45 / 50 mm	Double/Triple Bent Edges, Fully Welded Corners
2000 mm	300 / 280 / 240 mm	38 (Standard) / 42 / 45 / 50 mm	Double/Triple Bent Edges, Fully Welded Corners
1250 mm	300 / 280 / 240 mm	38 (Standard) / 42 / 45 / 50 mm	Double/Triple Bent Edges, Fully Welded Corners

* Custom lengths available on request.

Structural Design Parameters

Rib Profile 2-fold / 3-fold, 38 mm standard	Deflection Limit Span/ 60 service load	Stiffener Spacing 500mm c/c transverse
Max Plank Gap 25 mm	Overhang 50 mm min 150 mm max	Hook / End Fitting Fully seated on ledger

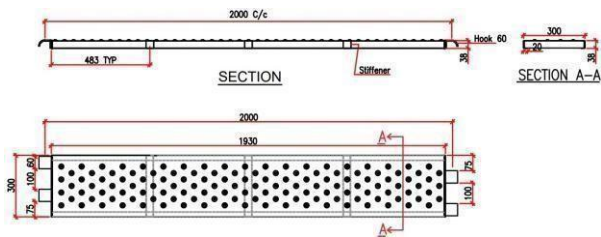

SIZE	2000× 300mm
SELF-WEIGHT	16.5kg
DENSITY	246.11 Dimples/m ²
DECK SHEET	2mm (14 Gauge)
GALVANISING	Min 45µm
HOOKTYPE	Hook60 -both ends

The G.P. (Pre-Galvanized) Sheet Board with Hook is a standardized walkway plank designed for safe and efficient access across scaffolding systems and elevated work platforms.

Manufactured from pre-galvanized mild-steel, the plank features an antiskid dimple-perforated deck surface that provides excellent slip resistance under typical site conditions. The plank is 2000 mm in length and 300 mm in width, ensuring a stable and secure walking platform.

Structural integrity is ensured through a 2 mm thick deck sheet (14 Gauge) fitted with three internal transverse stiffeners spaced at 483 mm centers to distribute load uniformly across the full 2000 mm span.

Nominal self-weight of the plank is 16.5 kg

Each plank is fitted with welded hook ends-fittings (Hook 60) at both ends, designed for secure engagement with scaffold transoms and preventing unwanted movement during use.


The anti-skid deck features a dimple density of 246.11 Dimples/ m², providing enhanced grip, improved drainage, and reliable slip resistance under demanding site conditions.

The anti-skid dimples are arranged with a center-to-center spacing of 65 mm vertically 50 mm horizontally ensuring uniform grip.


PRIME STEELTECH INDIA steel walkway planks feature one of the highest dimple densities in the industry, providing superior anti slip performance, enhanced grip, and improved operator safety.

Hook Specifications

- 60 mm E250 Grade HR (MS) Hooks:** Manufactured from high-strength E250 Grade Hot Rolled (MS) steel for superior durability and long service life. The Hot Rolled (MS) steel has a thickness of 6 mm.
- Secure & Stable Connection:** Precision-engineered hook design ensures firm engagement, enhanced stability, and reliable performance under working loads.

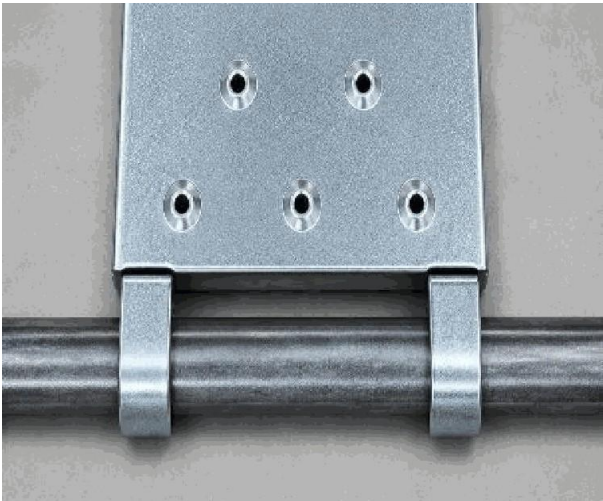

Hemispherical Hook

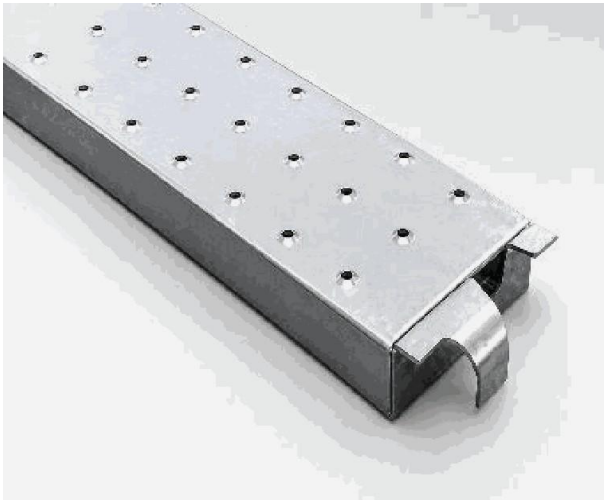

Dog-Ear Hook

Safety Guidelines (IS3696-1987)

■ SAFETY NOTICE

- Never exceed the Safe Working Load (SWL) for the plank and span combination.
- Conduct a project-specific risk assessment before permitting personnel access.

1. Inspect every plank before installation – remove cracked, bent or heavily corroded units immediately.
2. Ensure hooks / end fittings are fully seated on ledger or transom before personnel access.
3. Max platform gap between adjacent planks: 25 mm. Use infill strips where required.
4. Overhang: min 50 mm, max 150 mm. Secure planks against uplift in exposed locations.
5. Do not mix plank types / sizes within the same bay without written engineering approval.
6. Ensure all planks are securely seated and free from excessive movement before personnel access.
7. Display inspection tags (load class, date, inspector name) at each access point.
8. Field welding of stiffeners is NOT permitted – return damaged planks for factory repair.

Inspection & Maintenance (Suggested by PRIME STEELTECH INDIA)

PRE-USE	Check welds, hooks & deck for cracks, deformation or corrosion before every use.	ZINC COATING	Inspect annually; re-galvanize if coating falls below 25 µm.
HOOKS	Reject if bent >5° or weld cracked – quarantine immediately.	WELDCHECK	Visible weld cracks at corners → immediate withdrawal. Field welding NOT permitted.
DECK INTEGRITY	Reject if buckling, holes or >20% loss of anti-slip pattern present.	STORAGE	Stack on level bearers; protect from ground moisture; avoid face-to-face stacking.
STIFFENERS	Inspect stiffener welds every 6 months. Remove from service if detached or cracked.	DEFECTIVE	Mark with red band and segregate before disposal or repair.
		MAINTENANCE	Touch-up cut edges with zinc-rich primer (min 45 µm). Do NOT paint over anti-skid dimples.

Antiskid-Walkway Plank Design

DECK THICKNESS	14 / 16 Gauge — 2 mm / 1.6 mm	STIFFENER SPACING	500 mm c/c transverse · Longitudinal added when width > 400 mm
BOARDWIDTH	300 / 280 / 240 mm	DEFLECTION LIMIT	Span / 60
BOARD LENGTHS	1250 / 2000 / 2500 / 3000 mm Custom on request	MAX PLANK GAP	25 mm
GALVANISING	Min 45 µm zinc · Pre-Galvanized	OVERHANG	50 mm min / 150 mm max
ANTI-SKID OPTIONS	Antiskid Dimple Plate(std) · Diamond Checker (req) · Checker Plate (req)	COMPATIBLE SYSTEMS	Tube-and-Coupler · Cuplock · Frame Scaffold · Ringlock

Applicable Standards

Standard	Scope
IS 3696 (Pt. 1 & 2):1987	Safety code for scaffoldings
IS 4014 (Pt. 1 & 2):1967	Code of practice — steel tubular scaffolding
IS 816:1969	Code of practice for manual metal arc welding
BS EN 10346:2015	Pre-Galvanized (continuously hot-dip coated) steel flat products for cold forming- Technical delivery conditions
IS 277:1951	Pre-Galvanized steel sheets, coils, and strips
ISO 9001:2015	Quality Management System

Contact & Further Information

PRIME STEELTECH (I) PVT. LTD. Office No. B-6, Tuljai CHS Ltd., Kasturba Cross Road, No. 4, Borivali (East), Mumbai -400 066, Maharashtra, India. Tel.: 86550 10046 Mob.: +91-93245 60020 enquiry@primesteeltech.co.in primesteeltech.com	Dharmesh Bhatt Founder Director Mob: +91-93223 21421 · dharmesh@primesteeltech.co.in Jayraj Bhatt Director— Business Development Mob: +91-93931 61504 · jayraj@primesteeltech.co.in
---	---

For reference only. Verify against current production data. ©PrimeSteeltech(I) Pvt. Ltd.